


PF / PFQ



Features and Ratings	p. 120
PF/PFQ 300-600A	p. 121
Spare parts	p. 123
Dimensions	p. 124

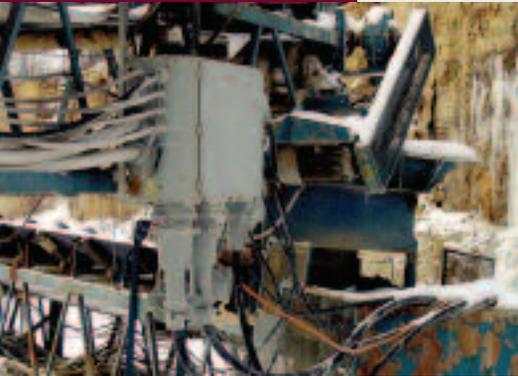

High amperage plugs & receptacles

PF and PFQ Series plugs and receptacles are engineered for use in high amperage applications where routine plug insertion and high reliability are required. They are ideal for power supply applications in mining, petroleum platform, ship to shore, power generation system, shipyard and other similar harsh environments.

Main Advantages

- ▼ Durable in harsh environments
- ▼ Safety features provide maximum protection
- ▼ Easy plug insertion and removal




PFQ300 devices are differentiated from similarly rated PF300 devices in their smaller size, lighter weight and different pilot contacts.

Product Features

Auxiliary Pilot Contacts

Provided for use with control circuits. They close after and open before the phase contacts.

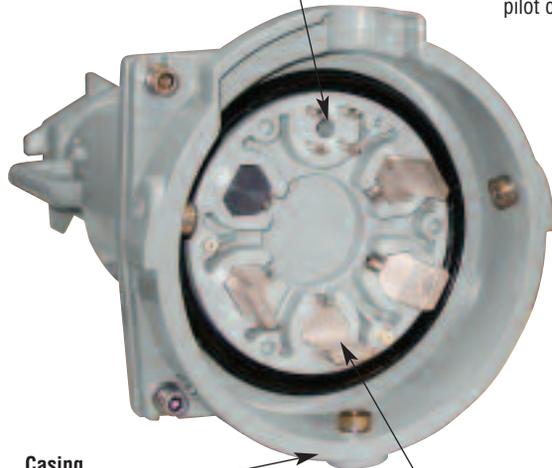

Mechanical Locking System

Ensures safety and watertightness. Mechanical lock secures the inlet to the receptacle and engages the pilot contacts.



Casing

Epoxy coated aluminum material offers great resistance to harsh environments.


Silver Pressure Contacts

Silver material and self-cleaning action provides maximum conductivity and performance in dirty and corrosive conditions.

Safety Shutter

Protects recessed female contacts and inhibits user access to live parts.

Operating Instructions



PF devices are preferred for the ease of operation relative to pin and sleeve devices.



Insert the plug into the receptacle – this is done with little resistance relative to competitive devices.



Twist plug approximately 30° clockwise to engage the phase contacts and make unit watertight.



Turning the mechanical lock secures the inlet to the receptacle and engages the pilot contacts which energize the circuit.

5 To disconnect, turn mechanical lock to disengage pilot contacts and de-energize the circuit. Twist plug 30° counter-clockwise to disengage the phase contacts, withdraw plug.

General Ratings

Amperage	300 to 600A
Voltage ⁺	1000 VAC*, 1000 VDC Max
Frequency	50-400 Hz
Environmental	IP66 + 67
Temperature	min -40°F/max 140°F

* 600 VAC max for PFQ devices

+ UL listings do not apply above 600VAC and 250VDC

Listings


Category	UL	CSA
Plugs and Receptacles	UL 1682*	C22.2 No. 182.1*

* Listings only apply to 300A and 400A devices at 600V or less



PFQ3 devices are differentiated from similarly rated PF3 devices in their smaller size, lighter weight and different pilot contacts.


Highlighted Feature Pilot Contacts

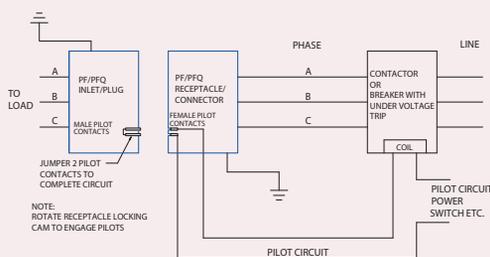

Line diagram of typical PF pilot control circuit

- Notes:**
- The mechanical locking of the plug to the receptacle, via the rotation of a cam, closes the pilot contacts.
 - Failure to use a pilot/relay system can create an electrical shock hazard.

Category	PF	PFQ
# Contacts	4	8
Pilot Amperage	10A standard duty	2A pilot duty
Interlocking Type	Mechanical	Mechanical
Terminal Type	Screw	Solder/crimp

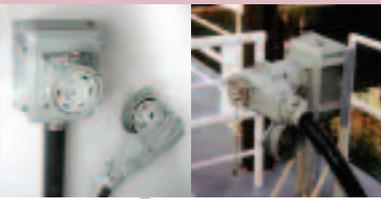

PF/PFQ – 300A - 600A High Ampacity Plugs & Receptacles

Ratings

- Voltage**
PF = 1000 VAC¹, 250 VDC
PFQ = 600 VAC, 250 VDC
¹ Listings apply only to 300A & 400A devices at 600V or less
- Current Interruption Capability**
Not for current interrupting
- Environmental Ratings**
IP66 + 67
- Temperature Range**
Min -40°F/Max 140°F
See pg 194 for temps below -15°F.
- Wiring Capacity**
PFQ = 4/0 AWG to 350 MCM
PF = 250 MCM to 600 MCM
- Pilot Contacts**
PFQ = 8
PF = 4
- Listings**
UL, CSA

PFQ300 devices are differentiated from similarly rated PF300 devices in their smaller size, lighter weight and different pilot contacts.

Receptacle / Cap (female) 300A



Don't forget to add installation accessories to your order

Voltage	Polarity	Part #	
		PFQ300	PF300
277V	1P+N+E	47-34045	49-34045
347V	1P+N+E	47-34145	49-34145
480V	2P+E	47-34042	49-34042
480V	2P+N+E	47-34046	49-34046
480V	3P+E	47-34043	49-34043
480V	3P+N+E	47-34047	49-34047
600V	2P+E	47-34142	49-34142
600V	2P+N+E	47-34146	49-34146
600V	3P+E	47-34143	49-34143
600V	3P+N+E	47-34147	49-34147

Inlet / Cap (male) 300A



Voltage	Polarity	Part #	
		PFQ300	PF300
277V	1P+N+E	47-38045	49-38045
347V	1P+N+E	47-38145	49-38145
480V	2P+E	47-38042	49-38042
480V	2P+N+E	47-38046	49-38046
480V	3P+E	47-38043	49-38043
480V	3P+N+E	47-38047	49-38047
600V	2P+E	47-38142	49-38142
600V	2P+N+E	47-38146	49-38146
600V	3P+E	47-38143	49-38143
600V	3P+N+E	47-38147	49-38147

Other voltage configurations are available – contact customer service at 800.433.7642.

Main Options



Receptacle with no cap

With no cap Recept # - 48



Inlet with no cap

With no cap Inlet # - 48

Notes: • Metal caps are provided as standard with male and female devices.

PF/PFQ devices are not intended for connection or disconnection under load. To prevent live making or breaking electrical interlocking is required.

Receptacle / Cap (female) 400A / 600A



Inlet / Cap (male) 400A / 600A



Voltage	Polarity	Part #	
		PF400	PF600
277V	1P+N+E	49-44045	49-64045
347V	1P+N+E	49-44145	49-64145
480V	2P+E	49-44042	49-64042
480V	2P+N+E	49-44046	49-64046
480V	3P+E	49-44043	49-64043
480V	3P+N+E	49-44047	49-64047
600V	2P+E	49-44142	49-64142
600V	2P+N+E	49-44146	49-64146
600V	3P+E	49-44143	49-64143
600V	3P+N+E	49-44147	49-64147

Voltage	Polarity	Part #	
		PF400	PF600
277V	1P+N+E	49-48045	49-68045
347V	1P+N+E	49-48145	49-68145
480V	2P+E	49-48042	49-68042
480V	2P+N+E	49-48046	49-68046
480V	3P+E	49-48043	49-68043
480V	3P+N+E	49-48047	49-68047
600V	2P+E	49-48142	49-68142
600V	2P+N+E	49-48146	49-68146
600V	3P+E	49-48143	49-68143
600V	3P+N+E	49-48147	49-68147

Installation Accessories

Handles




Inlet/Receptacle Size	Cable Range	Metal Straight Handle	Metal 90° Angled Handle
PFQ3	See table	47-3A013-XXX	47-3A913-XXX
PF3	See table	49-3A013-XXX	49-3A913-XXX
PF4	See table	49-4A013-XXX	49-4A913-XXX
PF6	See table	49-6A013-XXX	49-6A913-XXX

Cable Ranges

XXX (Suffix #)	Cable Range	XXX (Suffix #)	Cable Range
-200	2.000 - 2.125	-300	2.750 - 3.000
-225	2.125 - 2.250	-312	3.000 - 3.125
-237	2.250 - 2.375	-335	3.125 - 3.350
-250	2.375 - 2.500	-350	3.350 - 3.500
-275	2.500 - 2.750	-	-

Junction Boxes



Inlet/Receptacle Size	Hub Sizes	Metal Junction Box
PFQ3	See table	MB40PFQ-XX
PF3	See table	MB40-XX
PF4	See table	MB40-XX
PF6	See table	MB40-XX

Hub Sizes

XX (Suffix #)	Fitting Size
-20	2" NPT
-25	2.5" NPT
-30	3" NPT
-35	3.5" NPT
-40	4" NPT

Highlighted Feature

Bolt-on Lug

Angled Lug

Straight Lug



The PF and PFQ contacts utilize bolt-on lug type wire terminals, which require a compression lug with a 9/16" or 5/8" hole. The angled handle requires straight lugs; the straight handle requires 90° lugs. Lugs are not included.

Miscellaneous Accessories



Inlet/Receptacle Size	Inlet Replacement Metal Cap	Receptacle Replacement Metal Cap
PFQ3	47-3A126	47-3A925
PF3	49-3A126	49-3A925
PF4	49-4A126	49-4A925
PF6	49-6A126	49-6A925

Weights

Part	PF	PFQ3
Inlet	15 lbs	9 lbs
Receptacle	25 lbs	12 lbs
Angled Handle	15 lbs	12 lbs
Straight Handle	10 lbs	10 lbs
Junction Box	45 lbs	45 lbs
Cap	3 lbs	3 lbs

Order Example

A typical order should include an inlet part number, a receptacle part number **AND** the matching handles, angles or other required accessories.



Male Inlet with Handle (Plug)
47-38047 + 47-3A913-200



Female Receptacle with Junction Box
47-34047 + MB40-20